
Aluminum Tape

Solution for Reliable Thermocouple Attachment

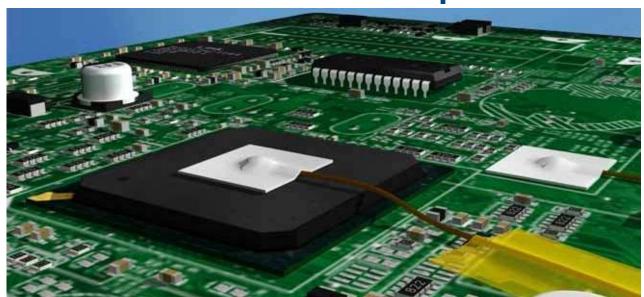

Don't Sacrifice PCBS for Profiling

TECHNICAL SPECIFICATIONS

- Non-destructive TC attachment
- · Reliable TC readings
- No waiting for curing or soldering
- Fast, easy setup

Typical Properties	SPECIFICATIONS
Physical	
Color	White
Thickness, mm (inch)	0.15 (0.006)
Adhesive CTE, ppm/°C lppm/°F	300
THERMAL	
Thermal impedance °C -cm²/W (°C -in²/W)	3.4 (0.5)
Thermal conductivity W/m-K	0.5
REGULATORY	
RoHS compliant	Yes
Shelf life, months after purchase	12
Flammability rating (See UL File E140244)	V-0



Double Sided Thermally C ond uct ive Tape Used for Attaching Thermocouples to PCBs

sold in 1 inch x 10 foot rolls

Authorized Distributor Mectronics Marketing Services

313, 2nd Floor, Patparganj Industrial Area,

New Delhi - 110092 (India)

Tel : +91 (011)-43041581 / 42208256

E-Mail: mectronics@mectronics.in

Web: www.mectronics.in



Technical Support — 24 Hours EveryDay — Everywhere