


ATRON® SP 200

Water-based cleaning medium for the removal of fluxes from solder pallets and condensation traps



ATRON® SP 200 is an aqueous-alkaline surfactant cleaner, specifically developed to remove baked-on fluxes from solder pallets and condensation traps. ATRON® SP 200 can also be used for the removal of unsoldered solder pastes from SMT stencils. The cleaner is suitable for air assisted, ultrasonic and spray-in-air cleaning equipment.

Areas of application – Condensation traps / Solder frame / Stencil Cleaning

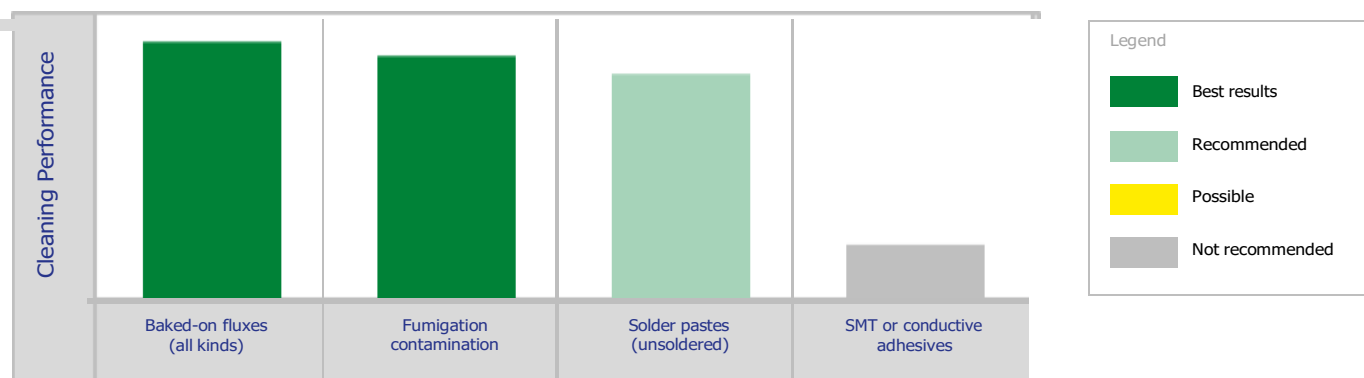

Advantages compared to other cleaners

- Simple, easy-to-use handling.
- 3 to 10 times longer bath life than traditional surfactant cleaners. The reduced number of bath changes results in a lower volume of cleaning agent disposal. Thereby, process costs are reduced. This was proven by several customer cases.
- Excellent compatibility with aluminum and epoxy surfaces.
- No build-up of organics in the rinsing section.
- Approved by leading international cleaning equipment and stencil manufacturers.
- ATRON® SP 200 is also suitable for cleaning conveyor fingers or the manual removal of extremely baked-on flux residues in solder ovens and similar applications.

Process Steps

Cleaning Process	1. Cleaning	2. Rinsing	3. Drying
Air assisted cleaning	ATRON® SP 200	Recommended: DI-water or tap water	Hot or circulating air
Ultrasonic	ATRON® SP 200	Recommended: DI-water or tap water	Hot or circulating air
Spray-in-air	ATRON® SP 200	DI-water or tap water	Hot or circulating air

Independent Test Center - Largest choice of leading machines, chemistry & analytics



Machine Test Center



Analytical Center

Visit our Machine Test Center and clean your maintenance parts under production conditions in cleaning machines of leading international equipment suppliers.

Contact ZESTRON's process engineers for cleaning trials:

Europe: Phone +49 (841) 63526; techsupport@zestron.com / South Asia: Phone +604 (3996) 100; support@zestronasia.com

Or visit our website for a virtual tour: <http://www.zestron.com/en/company/virtual-company-tour.html>

Technical Data*

Density	(g/ccm) at 20°C/68°F	1.00
Surface tension	(mN/m) at 25°C/77°F	n.a.
Boiling point	°C/°F	100°C / 212°F
Flash point	°C/°F	None until boiling
pH value	10g/l H ₂ O	12.0
Vapor pressure	(mbar) at 20°C/68°F	Approx. 23
Cleaning temperature	°C/°F	20-50°C / 68-122°F
Solubility in water		Soluble
Application concentration	Concentrate	10 - 25 %
HMIS Rating	Health-Flammability-Reactivity	0 - 0 - 0

* Please note that the information above represents ATRON® SP 200 at 15 % concentration.

Product Features & Cleaning Standards



100% compliance with EU guidelines
(RoHS 1, 2 & 3, WEEE)



Product is free of any critical substances according to
SIN & SVHC lists



Extensively tested and suitable for cleaning lead-free
solder pastes

Environmental, health & safety regulations

- ATRON® SP 200 is water-based and biodegradable.
- ATRON® SP 200 is formulated free of any halogenated compounds and therefore environmentally friendly.
- Refer to the SDS for specific handling precautions and instructions.
- This product is non-hazardous material.

Availability & Storage

1 Liter	✓
5 Liter	✓
25 Liter	✓
200 Liter	✓

- Available as concentrate
- Store ATRON® SP 200 in the original container at a temperature between 5 - 30°C / 41 - 86°F.
- The product has a minimum shelf life of 5 years in factory sealed containers.



Further product information

- Material Compatibility
Please review the Material Compatibility overview before using the cleaning agent
- FAST® Technology Sheet
Detailed information on FAST® Technology
- Safety Data Sheet

Available Process Optimization –Products

To ensure a stable running cleaning process, it is important to monitor cleaning agent concentration.
For ATRON® SP 200 following process support product is available:



Concentration measurement:

- ZESTRON® Easy Bath Control Kit a manual test method for fast and reliable checks of cleaning agent concentration.

Authorized Distributor

Mectronics Marketing Services

313, 2nd Floor, Patparganj Industrial Area,
New Delhi - 110092 (India)

Tel : +91 (011)-43041581 / 42208256

E-Mail : mectronics@mectronics.in

Web : www.mectronics.in