


ATRON® SP 300

Water-based cleaning medium for the removal of fluxes from solder pallets, condensation traps and cyclones



ATRON® SP 300 is an aqueous-alkaline cleaner, specifically designed to remove baked-on flux residues from cyclones, condensation traps and solder pallets. ATRON® SP 300 can be used in batch cleaning systems with air assisted cleaning and a unit for external cleaning of containers and tubing.

Areas of application – Condensation traps / Solder frame

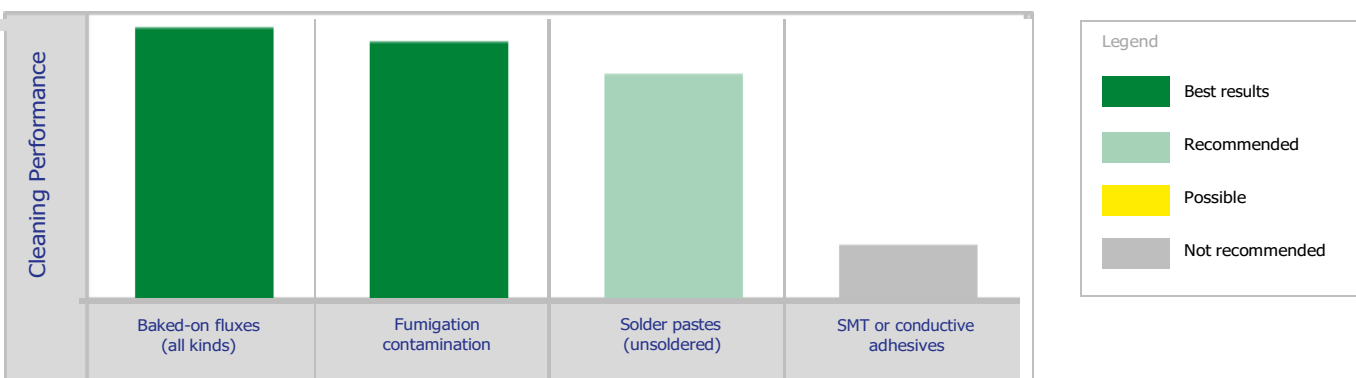

Advantages compared to other cleaners

- Extremely long bath life ensures reduced cleaning agent costs.
- Excellent cleaning performance with all types of flux and solder paste residues.
- Solid content-free formula, therefore no water rinsing or active drying required.
- Also suitable for spray-in-air-equipment.
- Extremely low VOC reduces emission values.
- Low odor.
- Exceptional material compatibility.

Process Steps

Cleaning Process	1. Cleaning	2. Rinsing	3. Drying
Air assisted cleaning	ATRON® SP 300	–*	–*
Spray-under-immersion	ATRON® SP 300	–*	–*
Spray-in-air	ATRON® SP 300	DI-water or tap water	Hot or circulating air

*Due to the excellent run-off characteristics of ATRON® SP 300, water rinsing and drying are only necessary in spray-in-air equipment

Independent Test Center - Largest choice of leading machines, chemistry & analytics



Machine Test Center



Analytical Center

Visit our Machine Test Center and clean your maintenance parts under production conditions in cleaning machines of leading international equipment suppliers.

Contact ZESTRON's process engineers for cleaning trials:

Europe: Phone +49 (841) 63526; techsupport@zestron.com / South Asia: Phone +604 (3996) 100; support@zestronasia.com

Or visit our website for a virtual tour: <http://www.zestron.com/en/company/virtual-company-tour.html>

Technical Data*

Density	(g/ccm) at 20°C/68°F	0.99
Surface tension	(mN/m) at 25°C/77°F	30.4
Boiling range	°C/°F	99-229°C / 210-444.2°F
Flash point	°C/°F	None until boiling
pH value	10g/l H ₂ O	11,2
Vapor pressure	(mbar) at 20°C/68°F	Approx. 18,7
Cleaning temperature	°C/°F	20-70°C / 68-158°F
Solubility in water		Soluble
Application concentration	Ready-to-use	Pure
Application concentration ¹	Concentrate	10 - 25 %
HMIS Rating	Health-Flammability-Reactivity	1 - 0 - 0

* Please note that the information above represents ATRON® SP 300 as a ready-to-use mixture.

¹ ATRON® SP 300 concentrate has to be diluted in DI-water.

Product Features & Cleaning Standards



100% compliance with EU guidelines
(RoHS 1, 2 & 3, WEEE)



Product is free of any critical substances according to
SIN & SVHC lists



Extensively tested and suitable for cleaning lead-free
solder pastes

Environmental, health & safety regulations

- ATRON® SP 300 is water-based and biodegradable.
- ATRON® SP 300 is formulated free of any halogenated compounds and therefore environmentally friendly.
- Refer to the SDS for specific handling precautions and instructions.
- This product is non-hazardous material.

Availability & Storage

1 Liter	✓
5 Liter	✓
25 Liter	✓
200 Liter	✓

- Available as concentrate and ready-to-use solution
- Store ATRON® SP 300 in the original container at a temperature between 5 - 30°C / 41 - 86°F.
- The product has a minimum shelf life of 5 years in factory sealed containers.



Further product information

- Material Compatibility
- Please review the Material Compatibility overview before using the cleaning agent
- FAST® Technology Sheet
Detailed information on FAST® Technology
- Safety Data Sheet

Available Process Optimization –Products

To ensure a stable running cleaning process, it is important to monitor cleaning agent concentration. For ATRON® SP 300 the following process support products are available:



Concentration measurement:

- ZESTRON® Bath Analyzer 10 a manual test method for fast and reliable checks of cleaning agent concentration.
- ZESTRON® Easy Bath Control Kit a manual test method for fast and reliable checks of cleaning agent concentration.

Authorized Distributor

Mectronics Marketing Services

313, 2nd Floor, Patparganj Industrial Area,
New Delhi - 110092 (India)

Tel : +91 (011)-43041581 / 42208256

E-Mail : mectronics@mectronics.in

Web : www.mectronics.in